

# RESIDENTIAL ESS SOLUTION

## DEYE SPRING RW SERIES



### Easy Operation & Maintenance

- Battery module auto networking ( No DIP switches )
- Support remotely monitoring and upgrade the firmware via Deye inverter
- Support external power supply activation, prevents battery suspension
- Allow over-discharge direct recharge, easy to maintain.



### Safer

- ( LFP ) Battery : Safe, long-lasting, high-efficiency. Built-in circuit breaker, Intelligent BMS. Eco-friendly materials, non-toxic, pollution-free module.



### Flexible Application

- Support Max. 32 units in parallel
- Built-in 10A constant-current limit charge
- Compatible with any brand inverter charge and discharge
- Suited to provide energy for backup power, residential, etc.



### Reliable

- Built-in circuit breaker, Support 160A charge and 160A discharge
- Charge from 0°C to 55°C, discharge from -20°C to 55°C

≥6000

Cycles

32 units

Max in parallel

70%

EOL

8kW

Maximum Output Power

# Wall-Mounted Battery (LV)



Model		RW-F16
<b>Main Parameter</b>		
Battery Chemistry		LiFePO <sub>4</sub>
Built-in Circuit Breaker		125A 2P, 60Vdc
Capacity ( Ah ) <sup>[1]</sup>		314
Scalability		Max. 32 pcs pack ( Max.512kWh ) in parallel
Nominal Voltage ( V )		51.2
Operating Voltage ( V )		44.8 ~ 57.6
Nominal Energy ( kWh ) <sup>[1]</sup>		16
Usable Energy ( kWh@90%DOD )		14.4
Charge / Discharge Current ( A ) <sup>[2]</sup>	Max. Continuous	160 / 160
	Peak	300 / 300 ( 10 sec )
<b>Other Parameter</b>		
Recommend Depth of Discharge		90%
Dimension ( W×H×D, mm )		480×830×235 ( Without hanging board and base )
Weight Approximate(kg)		122
Master LED Indicator		LED ( SOC and working state )
IP Rating of Enclosure		IP20
Operating Temperature		Charge : 0 ~ 55°C / Discharge : -20°C ~ 55°C
Recommend Operating Temperature		15°C ~ 35°C
Storage Temperature		0°C ~ 35°C
Relative Humidity		95%
Altitude		≤2000m
Cycle Life		≥6000 ( 25°C±2°C, 0.5C / 0.5C, 90%DOD, 70%EOL )
Installation		Wall-Mounted, Floor-Mounted
Communication Port		CAN2.0, RS485
Warranty Period <sup>[3]</sup>		5 years
Energy Throughput <sup>[3]</sup>		52.5MWh ( 25°C, 0.5C / 0.5C, 70%EOL )
Certification		UN38.3, MSDS

[1] Test conditions : 25°C±2°C, at beginning of life, 0.5C charge & 0.5C discharge,100% DOD.

[2] The current is affected by temperature and SOC.

[3] Conditions apply, refer to Deye Warranty Letter.

# Typical Application Scenarios

## Product Expansion

### Battery backup time




### RW-F16

Inverter	2h	3h	4h
SUN 12KW SG 04LP3	2 units	-	3 units
SUN 12KW SG 02LP1	2 units	-	3 units
SUN 12KW SG 05LP3	2 units	-	3 units
SUN 20KW SG 05LP3	3 units	4 units	5 units

RW-F16

RW-F16

SUN 12KW SG 04LP3

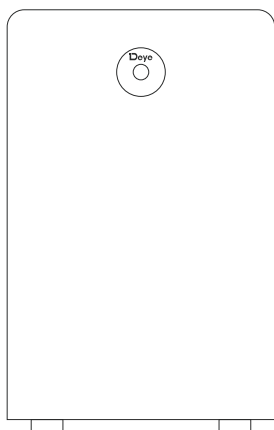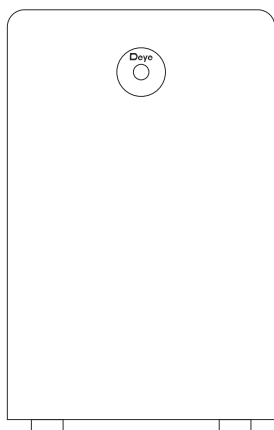





2hours

RW-F16

RW-F16

RW-F16

SUN 12KW SG 04LP3

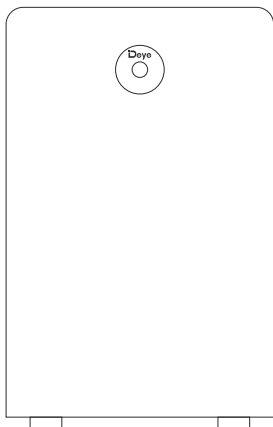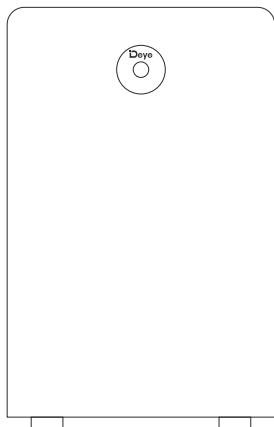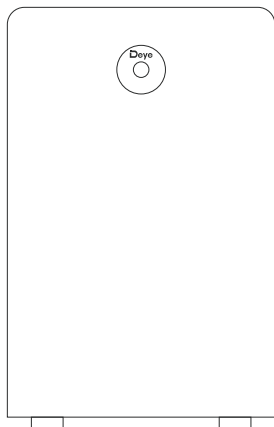

4hours



***To Make ESS Better***



Deye ESS Facebook



Deye ESS



[www.deyeess.com](http://www.deyeess.com)